


E		F		G	
REVISIONS					
LTR	DESCRIPTION	ECR	DATE	BY	APPRVD

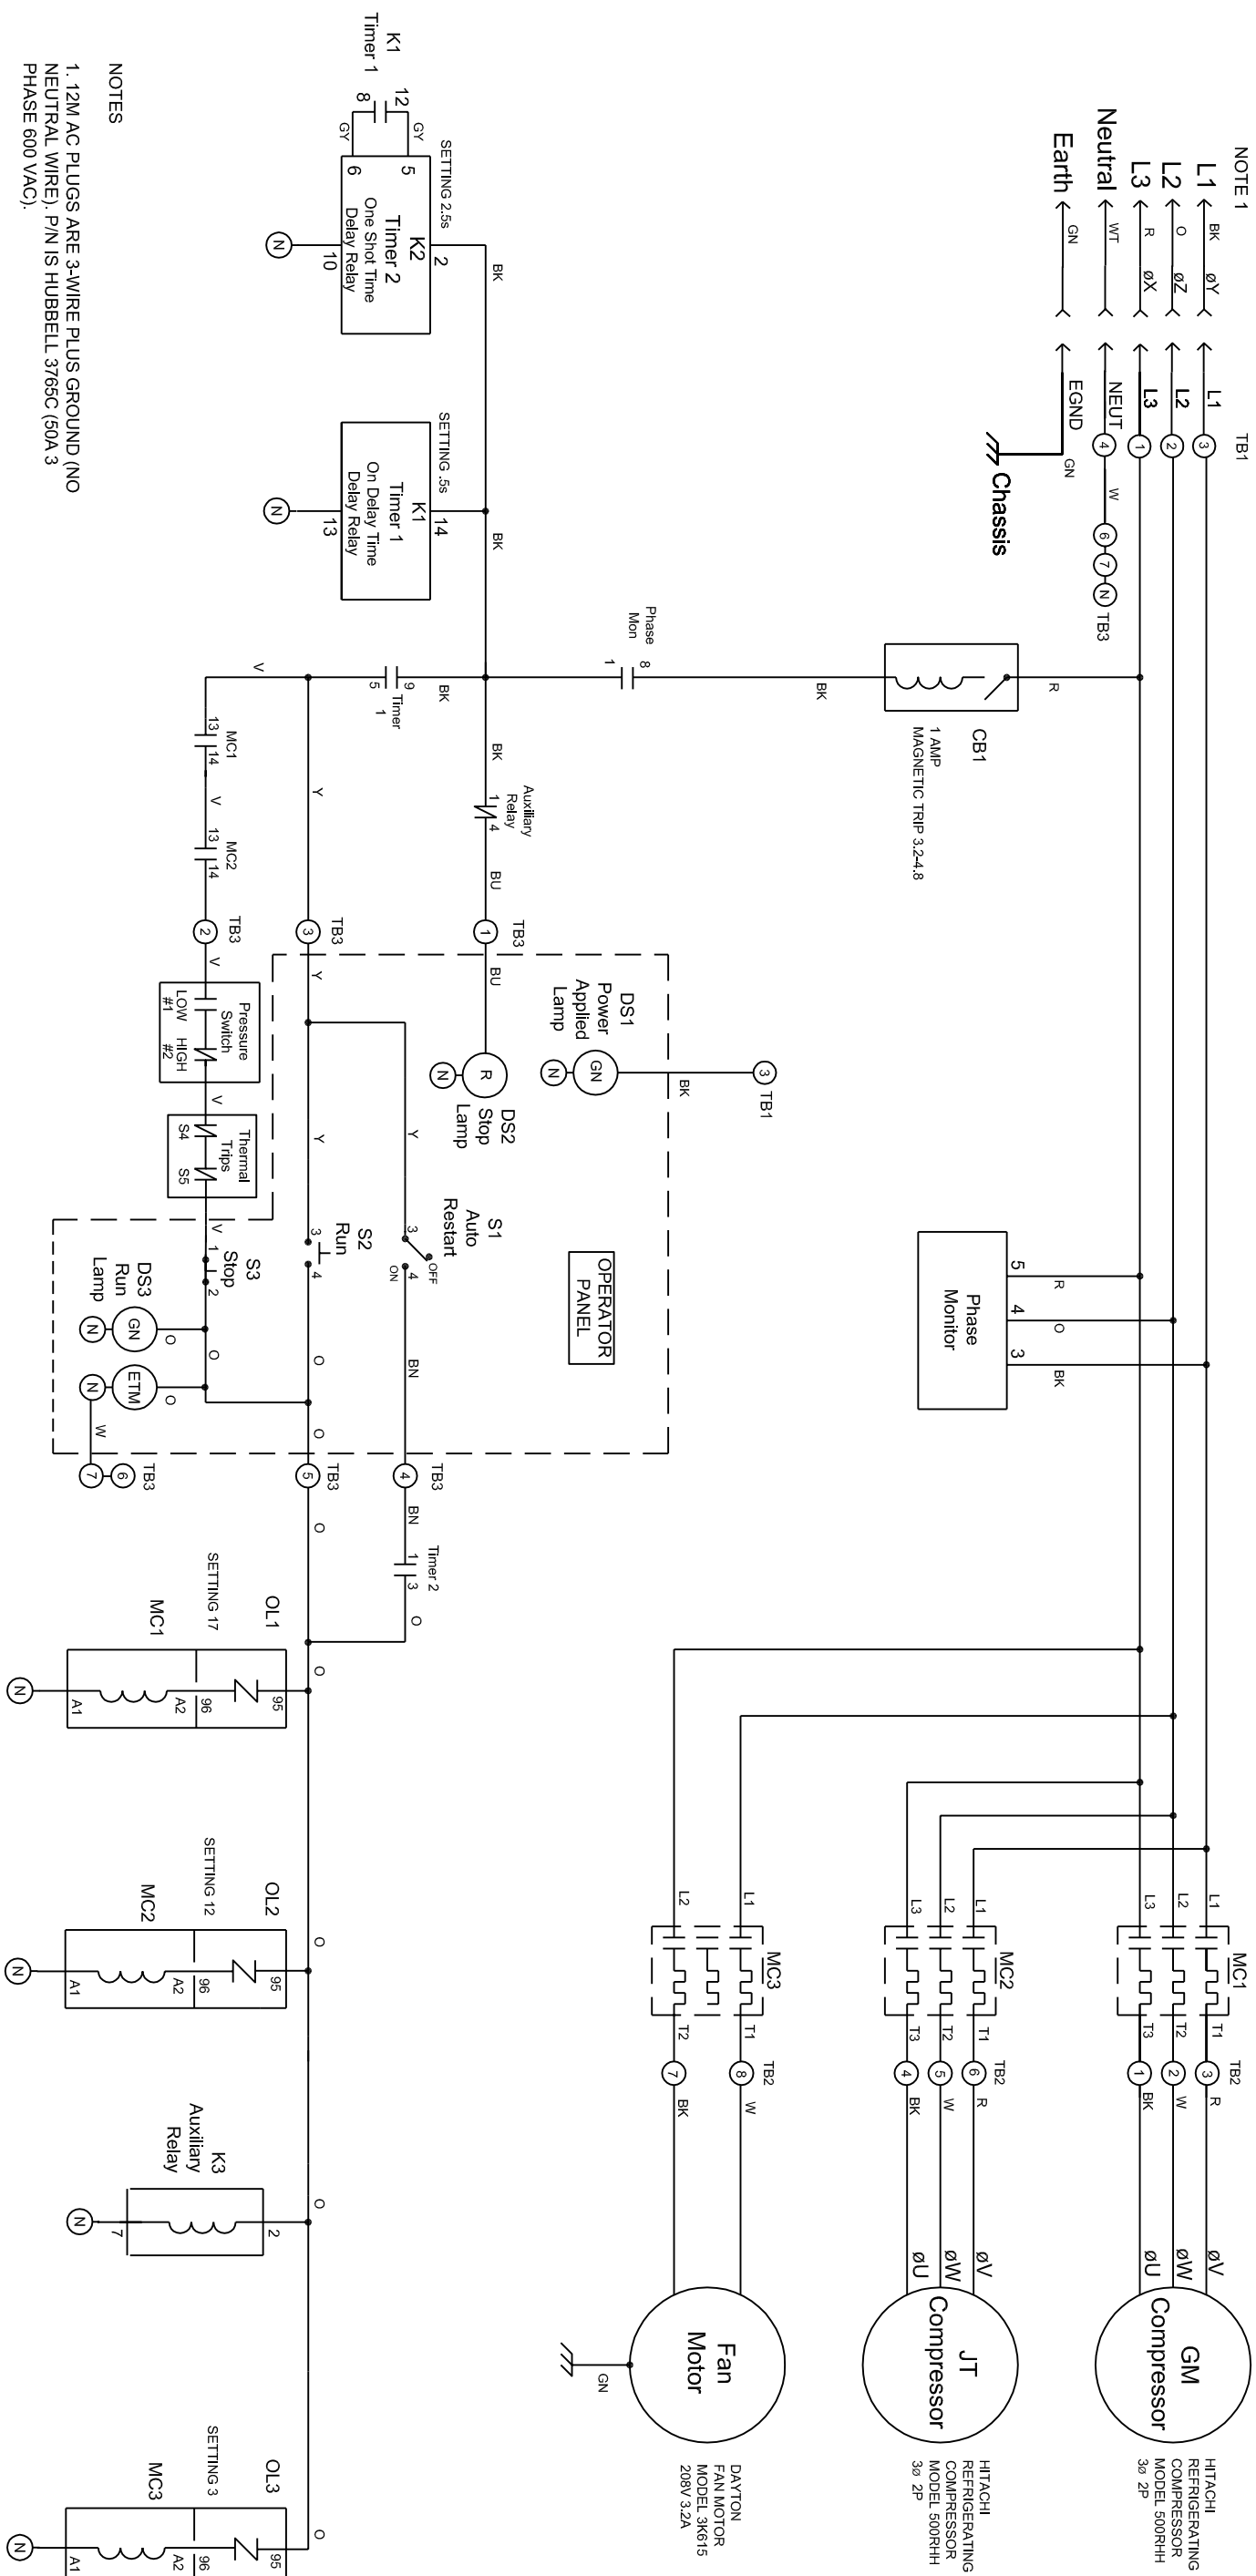

NOTES

1. 12M AC PLUGS ARE 3-WIRE PLUS GROUND (NO NEUTRAL WIRE). P/N IS HUBBELL 3765C (50A 3 PHASE 600 VAC).

SMT AC PLUGS AND DOWNTOWN AC PLUGS ARE 4-WIRE PLUS GROUND. P/N IS HUBBEL 560P9W (60A 3 PHASE 208 VAC).

2004 MODEL

UNLESS OTHERWISE NOTED		Resistors are in ohms 1/4W ± 5%		Capacitors are in microfarads μ F ± 20%		Inductors are in microhenrys μ H	
 VARIABLE CAPACITOR		 VARIABLE INDUCTOR		 VARIABLE RESISTOR		 VARIABLE CAPACITOR	
DESIGNED BY	DATE	Steward Observatory The University of Arizona Tucson, Arizona 85721 NAME SMT 4K JT COMPRESSOR ELECTRICS					
DRAWN BY	DATE						
K. CARLE	11-2-04						
CHECKED BY	DATE	NEXT ASSEMBLY		SIZE	DRAWING NO.	REV	
		B					
APPROVED BY	DATE	USED ON	REF	DO NOT SCALE DRAWING	RELEASED	SHEET	OF