


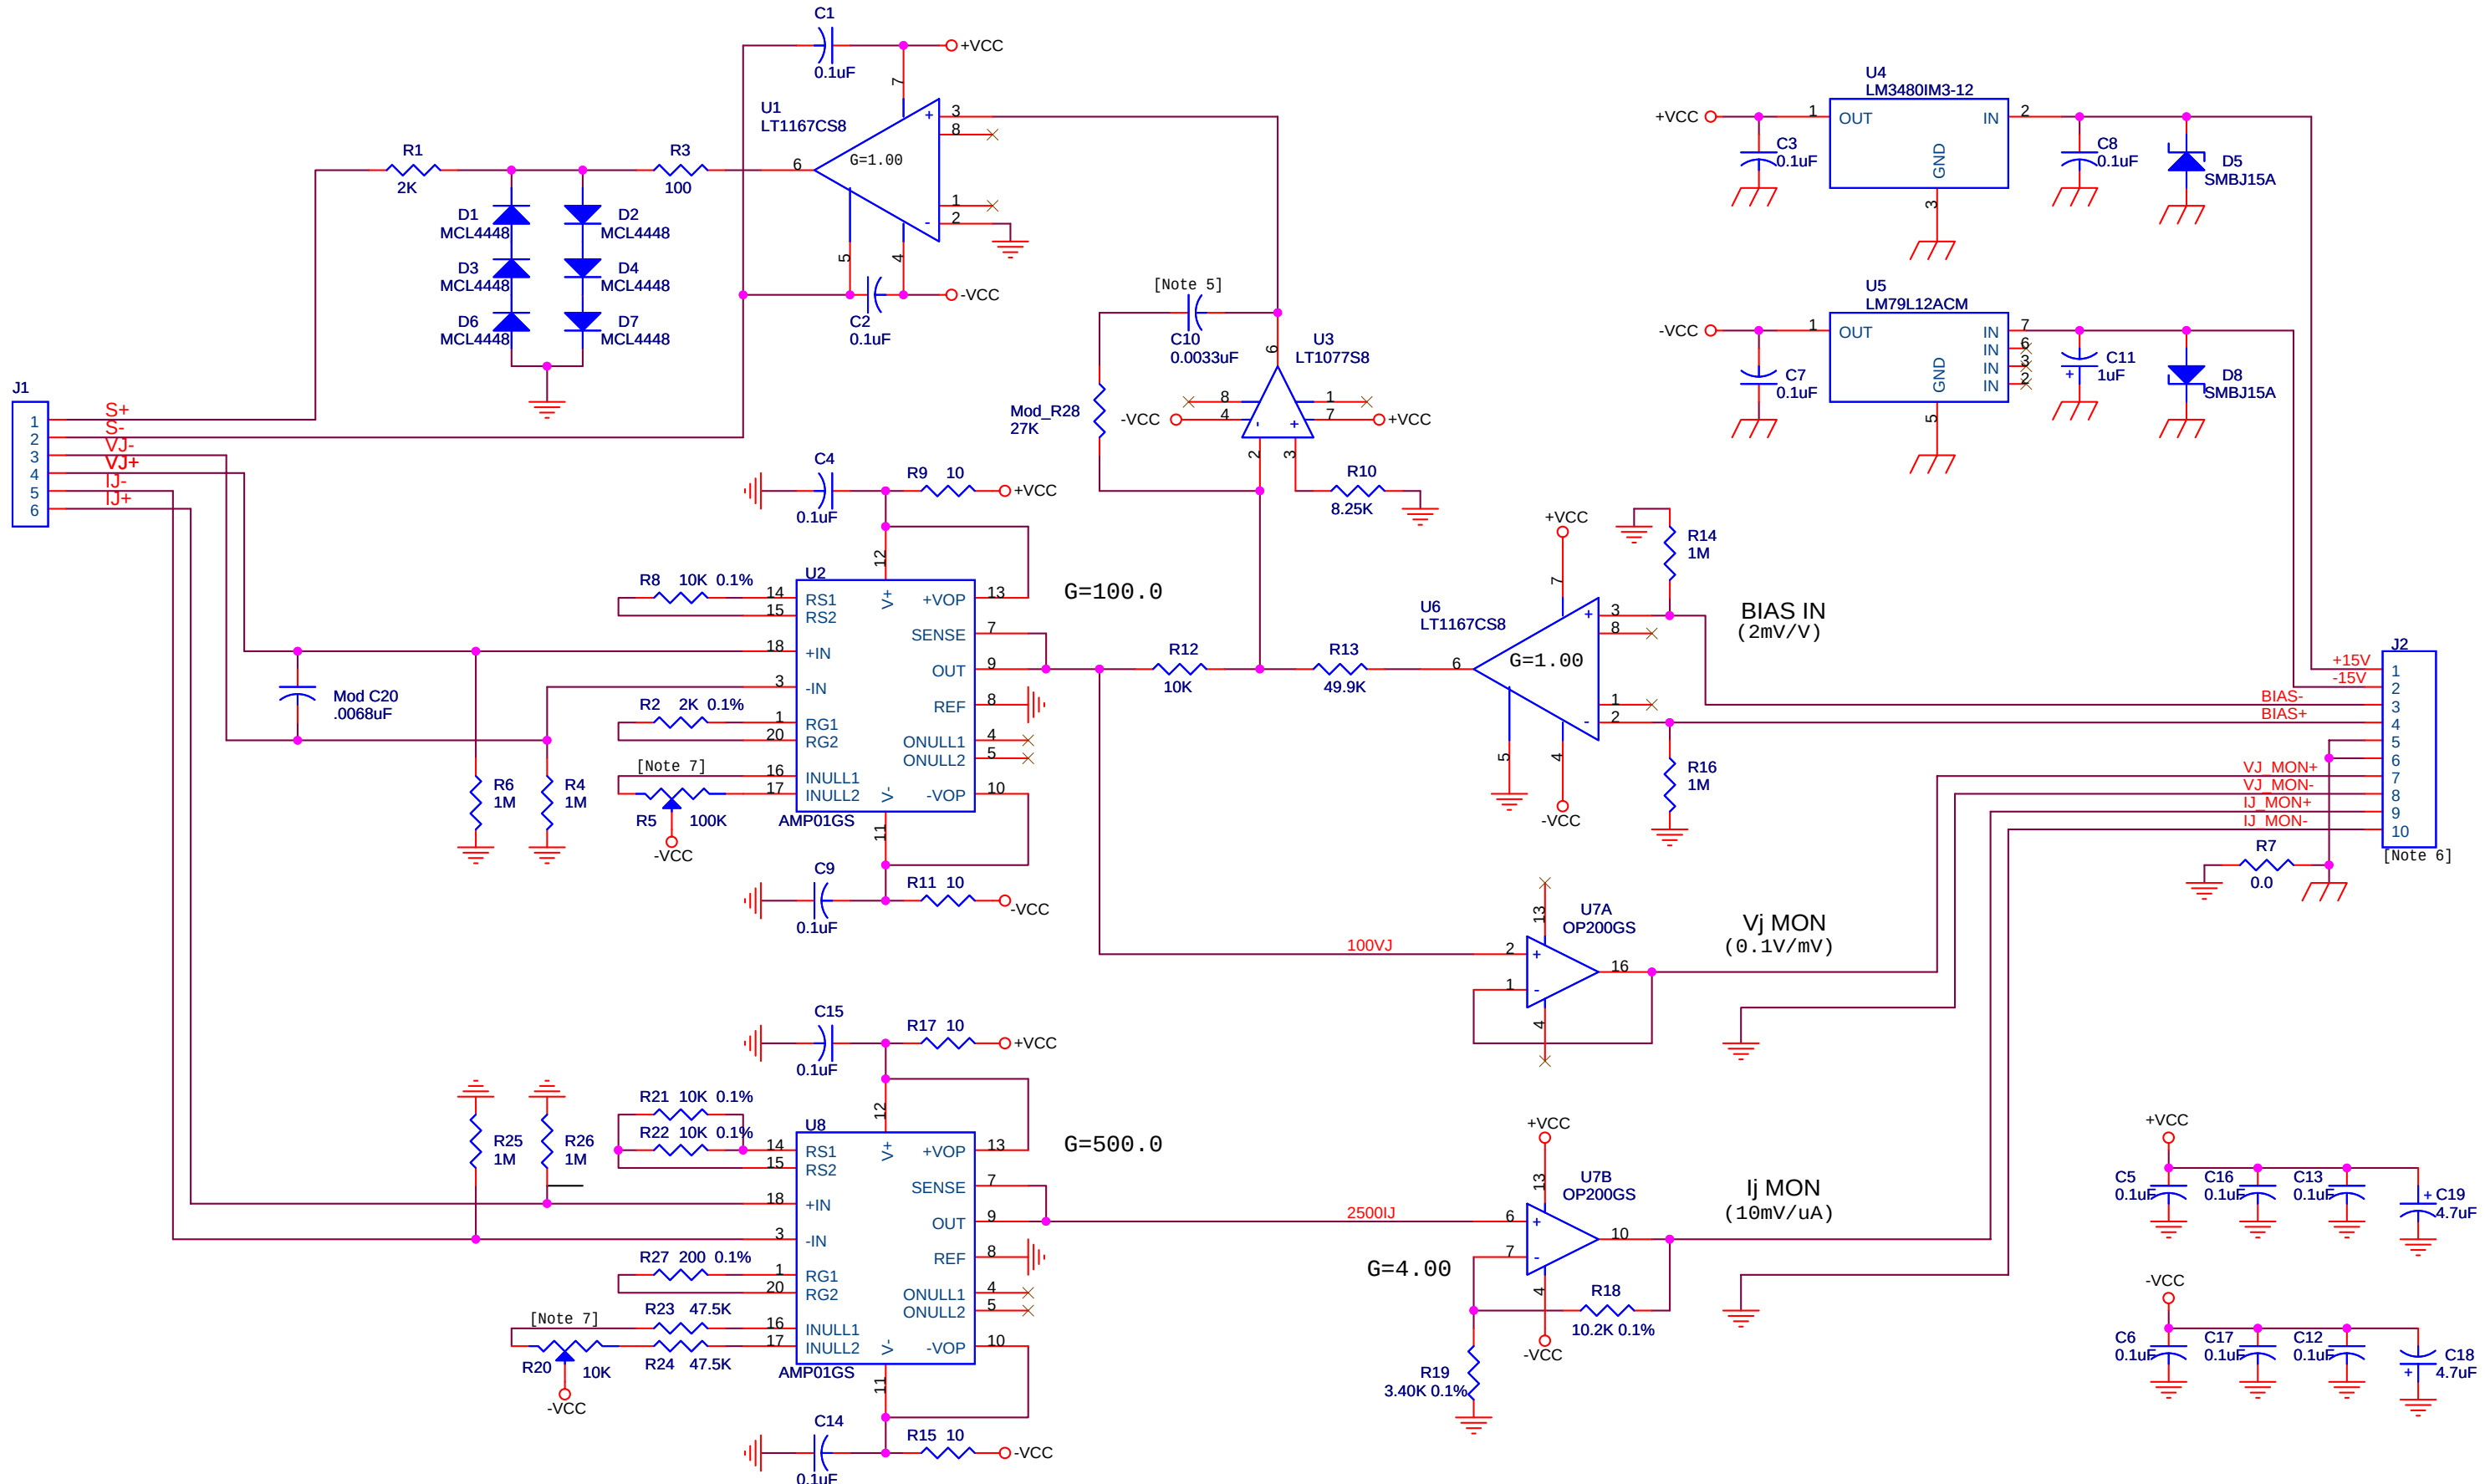

NOTES:

1. VCC = 12 VDC.
2. All fixed resistors are 0603 and 0805 1% metal film, unless noted.
3. All non-polarized caps. are ceramic SMD (0805), unless noted.
4. All polarized caps. are tantalum SMD.
5. Vishay KP1830 polypropylene film (or equiv).
6. Connector is SCI 52-970-205-FA2, or Tusonix 7910-013.
7. Multi-turn SMD pot, Bourns 3224W (or equiv).

National Radio Astronomy Observatory 949 N. Cherry Ave. Tucson AZ 85721-0655		
Title MMA Receiver SIS Bias Card, Type IIB (6-wire)		
Size B	Document Number BXXXXXSTXX	Rev
Date: Tuesday, January 04, 2005	Sheet 1	of 1